

Stopping theft every day.™



**high security
tamper resistant
anti-theft**



**LOSS PREVENTION
FASTENERS®** div of Ultra Fasteners Inc

NUTS | BOLTS | SCREWS | ANCHORS

**Everything you need: technical support,
custom solutions & timely delivery**

All sizes: inch & metric

Various materials

Custom & non-standard

True blind drop shipments

Cut sheets / technical data

Package, mini-bulk and 1/4 keg



A Buy America Act supplier

QUESTIONS, QUOTES & SOLUTIONS:

toll-free 1.888.584.6283 | sales@LPfast.com

LPfast.com

Stopping theft every day.™

This mini catalog is an overview of our most popular & unique security fasteners.

Visit LPfast.com for the detailed offerings

High Security. Tamper Resistant. Anti-Theft

If you don't see what you are looking for:
call us, we are your support team.


PH 1.888.584.6283

Ext 500 ask for Sales Dept

Ext 105 ask for Special Projects

sales@LPFast.com

All security options available

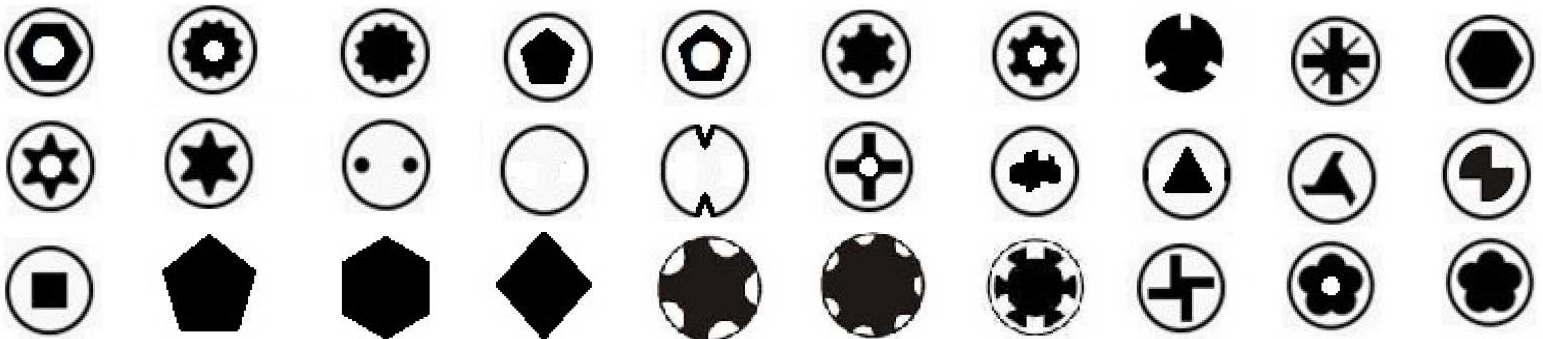

LOSS PREVENTION

FASTENERS

div of Ultra Fasteners Inc

PH 888.584.6283
www.LPfast.com

NUTS, BOLTS, SCREWS & ANCHORS - ALL BRANDS, SIZES & QUANTITIES



**LOSS PREVENTION
FASTENERS**
div of Ultra Fasteners Inc

Stopping theft every day.™

FEATURING



**ANCHORS
ULTRA 6 LOBE™**



T-GROOVE™ NUTS



ULTRA LOK S7™ NUTS
Patented



ULTRA LOK S7™ BOLTS
Patented



ULTRA 5 LOBE™



6 LOBE PIN



HEX PIN



AVSAFE



PENTAGON



TORK BOLT™



TORK-NUT™



SET SCREWS



SHCS PIN



BARREL NUT



PHILL PIN™



ONE WAY



SPANNER



SLOT-LOK™ BOLTS



SLOT-LOK™ NUTS



TRI-WING



SHACKLES



**TOGGLE BOLT
SECURITY**



ULTRA LOK II™



TOOLS

Questions, quotes & solutions: toll-free 1.888.584.6283 or sales@LPfast.com

LPfast.com

Ultra-Lok S7™


High Security Nut • 316 Stainless • Made in USA

PART # 316.ULS7SS

Desc: 3/8-16 Ultra-Lok S7
High Security Nut, 316 SS

- High Level Security
- Controlled Tools
- Proprietary Drive
- Best Tool Engagement
- Excellent Torque
- 316 Stainless
- Patent

3/8-16

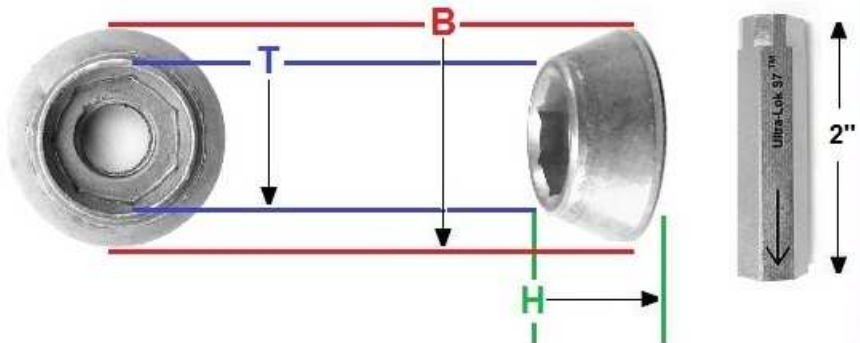

Made in USA

Size	Part #	Material	TOP DIAM. T	BOTTOM DIAM. B	HEIGHT H	Deep Socket Tool #
3/8-16	316.ULS7SS	316 SS	0.73"	1.00"	0.378"	375.S7B

S7™ are available for galvanized rod & studs

Ultra-Lok S7™


High Security Nut • 316 Stainless • Made in USA

PART # 113.ULS7SS

Desc: 1/2-13 Ultra-Lok S7
High Security Nut 316 SS

- High Level Security
- Controlled Tools
- Proprietary Drive
- Best Tool Engagement
- Excellent Torque
- 316 Stainless
- Patent

1/2-13

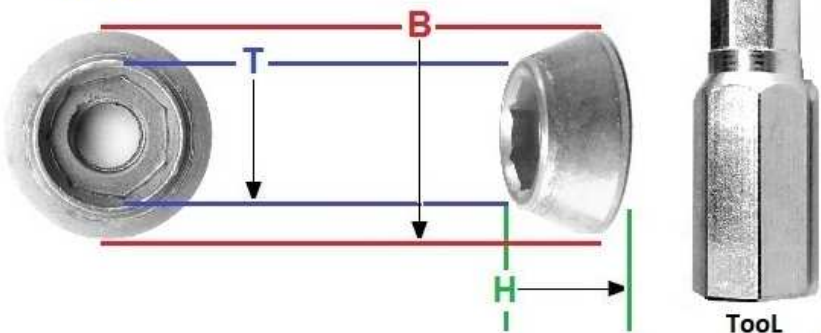

Made in USA

Size	Part #	Material	TOP DIAM. T	BOTTOM DIAM. B	HEIGHT H	Deep Socket Tool #
1/2-13	113.ULS7SS	316SS	.94"	1.25"	.50"	500.S7B



LOSS PREVENTION

FASTENERS

div of Ultra Fasteners Inc

PH 888.584.6283

www.LPfast.com

T-GROOVE™ NUTS SECURITY FASTENER




INCH & METRIC SIZES AVAILABLE



Superb security fastener:

- No sharp edges
- 316 stainless
- Design prevents pooling of liquids and debris

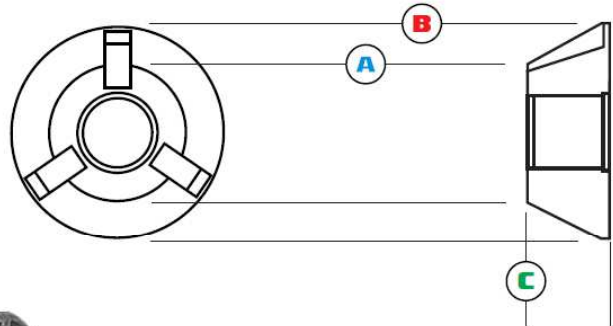

Produced from US-made/melted stainless steel



INSTALL
TOOL

ADDITIONAL SIZES &
THREAD PITCHES AVAILABLE

FITS	NUT SIZE *	PART NUMBER *	SOCKET PART NUMBER	TOP DIAMETER A	BOTTOM DIAMETER B	HEIGHT RANGE C
UNC	10-24	1024.TGNSS	LPF420	.446	.661	.260
UNF	10-32	1032.TGNSS	LPF420	.446	.661	.260
UNC	1/4-20	1420.TGNSS	LPF420	.446	.661	.260
UNF	1/4-28	1428.TGNSS	LPF420	.446	.661	.260
UNC	5/16-18	518.TGNSS	LPF430	.542	.830	.340
UNF	5/16-24	524.TGNSS	LPF430	.542	.830	.340
UNC	3/8-16	316.TGNSS	LPF430	.542	.830	.340
UNF	3/8-24	324.TGNSS	LPF430	.542	.830	.340
GALV	3/8-16	316.TGNSSOT	LPF430	.542	.830	.340
UNC	1/2-13	113.TGNSS	LPF440	.662	.945	.345
UNF	1/2-20	120.TGNSS	LPF440	.662	.945	.345
GALV	1/2-13	113.TGNSSOT	LPF440	.662	.945	.345
UNC	5/8-11	511.TGNSS	LPF475	1.000	1.500	.475
UNF	5/8-16	516.TGNSS	LPF475	1.000	1.500	.475
GALV	5/8-11	511.TGNSSOT	LPF475	1.000	1.500	.475
UNC	3/4-10	310.TGNSS	LPF475	1.000	1.500	.475
UNF	3/4-16	343.TGNSS	LPF475	1.000	1.500	.475
GALV	3/4-10	310.TGNSSOT	LPF475	1.000	1.500	.475
metric	6mm x 1.0	M6.TGNSS	LPF420	11.3mm	16.7mm	6.6mm
metric	8mm x 1.25	M8.TGNSS	LPF430	13.7mm	21mm	8.6mm
metric	10mm x 1.5	M10.TGNSS	LPF430	13.7mm	21mm	8.6mm
metric	12mm x 1.75	M12.TGNSS	LPF440	16.8mm	24mm	8.76mm
metric	14mm x 2.0	M14.TGNSS	LPF440	16.8mm	24mm	8.76mm
metric	16mm x 2.0	M16.TGNSS	LPF475	25mm	38mm	12mm
metric	20mm x 2.0	M20.TGNSS	LPF475	25mm	38mm	12mm

* ITEMS IN BOLD ARE TYPICALLY IN STOCK

Measurements +/-

10/2018


STOPPING THEFT EVERY DAY.™

Questions, quotes & solutions: toll-free 1.888.584.6283 or sales@LPfast.com | www.LPfast.com

HIGH SECURITY SLEEVE ANCHOR ULTRA-LOK II (3/8" & 1/2" dia.)



FAST & EASY TO INSTALL IN CONCRETE, BRICK AND STONE-BASED MATERIALS

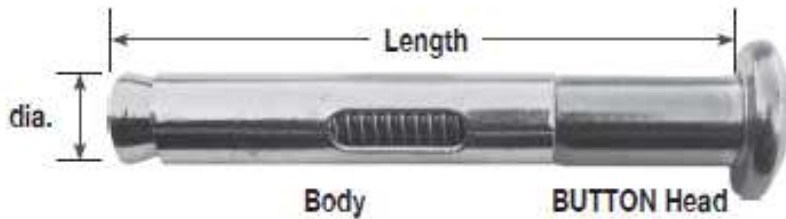

TOOLS ONLY SOLD TO AUTHORIZED PERSONNEL
Ultra-Lok II proprietary drive exclusive to LPfast.com



Made in the USA



SIZE (DIA. x LENGTH) * inch	PART NUMBER Stainless Steel Head, Zinc Body	PART NUMBER Stainless Steel Head & Body	INSTALLATION TOOL
3/8 x 2-1/2	375.2500UBIISZ	375.2500UBIISS	31UII.3125B
3/8 x 3-3/4	375.3750UBIISZ	375.3750UBIISS	
3/8 x 4-3/4	375.4750UBIISZ	375.4750UBIISS	
1/2 x 3-1/4	500.3250UBIISZ	500.3250UBIISS	12UII.3125B
1/2 x 4	500.400UBIISZ	500.400UBIISS	
1/2 x 5	500.500UBIISZ	500.500UBIISS	
1/2 x 7	500.700UBIISZ	500.700UBIISS	

* Anchor lengths are measured from underneath the head.

* To determine the minimum length of anchor required, add the thickness of the material to be fastened to the minimum embedment for the diameter of anchor being installed.

Installation

1. Drill a hole into the base material at least 3/8" deeper than the anchor length. Make the hole the same size as the anchor diameter (3/8" hole for 3/8" anchor).
 2. Blow the hole clean using compressed air. Alternatively, drill the hole deep enough to accommodate embedment length and drilling dust.
 3. Install the Ultra-Lok II security anchor through the fixture directly into the base material.
 4. Tighten to required installation torque (see below).
- IMPORTANT:** Make sure the hole in the item being attached is slightly larger than the anchor diameter.

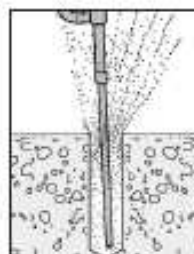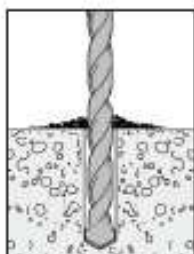

10/2018


STOPPING THEFT EVERY DAY.™

Questions, quotes & solutions: toll-free 1.888.584.6283 or sales@LPfast.com | www.LPfast.com


SECURITY SLEEVE ANCHOR ULTRA 6 LOBE



FAST & EASY TO INSTALL IN CONCRETE, BRICK AND STONE-BASED MATERIALS

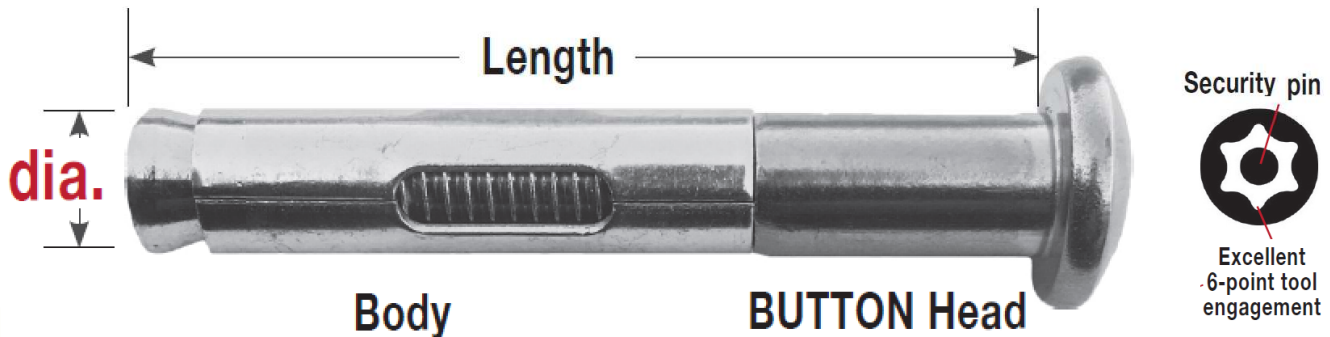

- 1/4" dia,** various lengths & materials Tool # 27T.250B
- 3/8" dia,** various lengths & materials Tool # 45T.250B
- 1/2" dia,** various lengths & materials Tool # 55T.250B
- * 5/8" dia,** various lengths & materials Tool # 55T.250B
- * 3/4" dia,** various lengths & materials Tool # 55T.250B

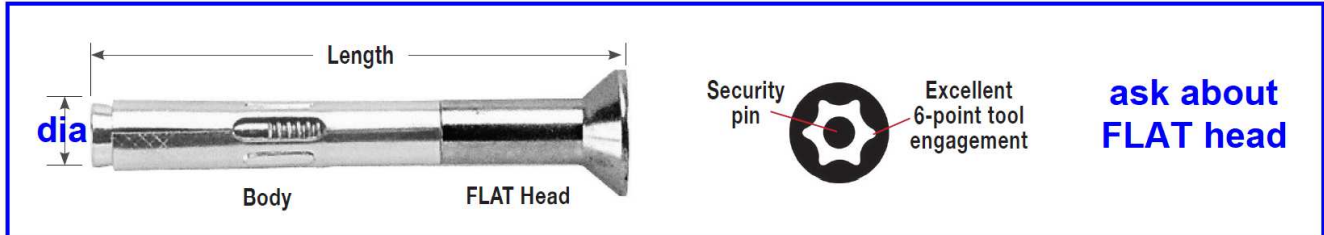


Installation

1. Drill a hole into the base material at least 3/8" deeper than the anchor length. Make the hole the same size as the anchor diameter (3/8" hole for 3/8" anchor).
2. Blow the hole clean using compressed air. Alternatively, drill the hole deep enough to accommodate embedment length and drilling dust.
3. Install the Ultra 6 Lobe security anchor through the fixture directly into the base material.
4. Tighten to required installation torque (see below).

IMPORTANT: Make sure the hole in the item being attached is slightly larger than the anchor diameter.

¹ The tabulated allowable loads are based on a safety factor of 4.0.

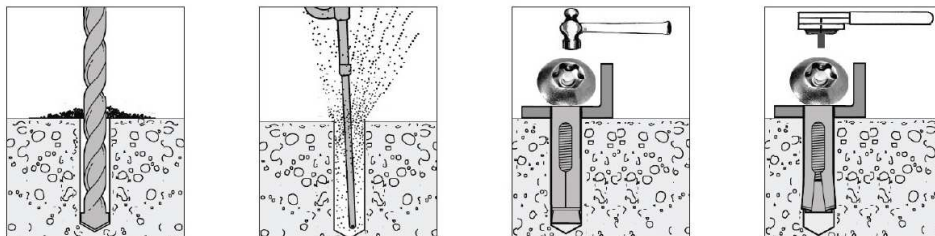

**LOSS PREVENTION
FASTENERS**
div of Ultra Fasteners Inc

PH 888.584.6283
www.LPfast.com

ULTRA-LOK S7™

HIGH SECURITY



High Security Nuts & Bolts

Superior drive system
Restricted tool program

Made in



EXCLUSIVE TO DISTRIBUTORS | PATENTED

All sizes: inch & metric
Package, mini-bulk and 1/4 keg
True blind drop shipments
Cut sheets / technical data
Minimum quantities may apply



 A Buy America Act supplier

10/2018

STOPPING THEFT EVERY DAY.™

Questions, quotes & solutions: toll-free 1.888.584.6283 or sales@LPfast.com | www.LPfast.com

ULTRA-LOK S7™

HIGH SECURITY




High Security

Superior drive system
Restricted tool program

Made in 

INCH & METRIC SIZES | PATENT PENDING

All sizes: inch & metric
Package, mini-bulk and 1/4 keg
True blind drop shipments
Cut sheets / technical data
 A Buy America Act supplier



Ultra-Lok S7 Deep Socket



QUESTIONS, QUOTES & SOLUTIONS:

toll-free 1.888.584.6283 | sales@LPfast.com | www.LPfast.com




**LOSS PREVENTION
FASTENERS®** div of Ultra Fasteners Inc



**MACHINE SCREWS
TEK/DRILL POINT**

**SHEET METAL SCREWS
BUTTON & FLAT HEAD**

INCH & METRIC SIZES

Made in the USA 

Assortments Drawer



13-3/8" x 9-1/4" x 2"


- Durable, welded STEEL drawers with hinged lid, finished in grey enamel
- Scooped bins for easy access
- Detailed inside label with description
- Individual refill items available

Most Popular Drawer Assortments

All drawers have 183 pieces including tools

PART NUMBER	ASSORTMENT
TBMSS.KIT	Button Head, 6 Lobe Pin, MS, Stainless 6-32, 8-32, 10-32, 10-24
TFMSS.KIT	Flat Head, 6 Lobe Pin, MS, Stainless 6-32, 8-32, 10-32, 10-24
TBSS.KIT	Button Head, 6 Lobe Pin, SMS, Stainless #6, #8, #10
TFSS.KIT	Flat Head, 6 Lobe Pin, SMS, Stainless #6, #8, #10
HBMSS.KIT	Button Head, Hex Pin, MS, Stainless 6-32, 8-32, 10-32, 10-24
HFMSS.KIT	Flat Head, Hex Pin, MS, Stainless 6-32, 8-32, 10-32, 10-24
HBSS.KIT	Button Head, Hex Pin, SMS, Stainless #6, #8, #10
HFSS.KIT	Flat Head, Hex Pin, SMS, Stainless #6, #8, #10

AVSAFE Oval-Pan Security Screws & Tools

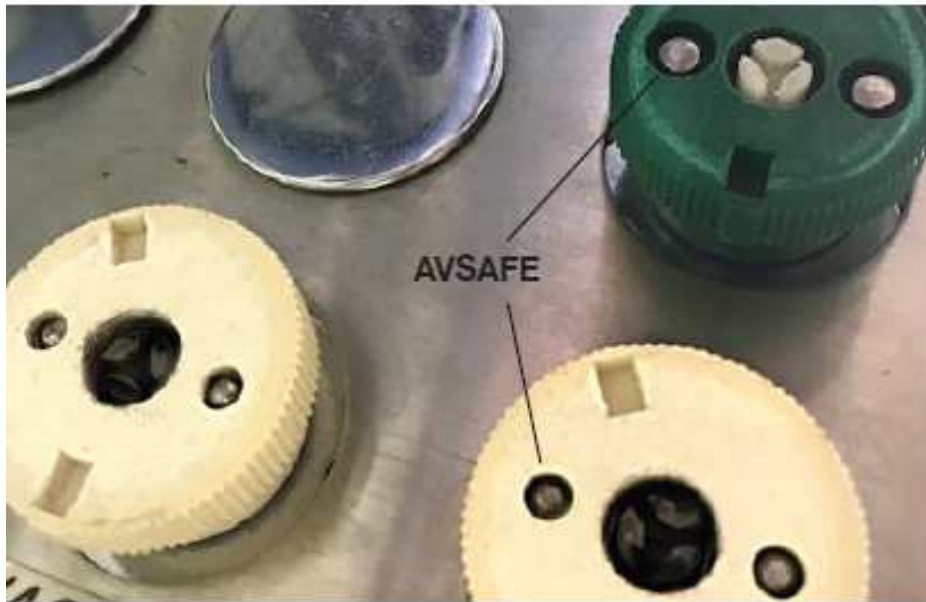

TAMPER-RESISTANT SECURITY FASTENERS THAT HIDE IN PLAIN SIGHT

High Security

- Oval-pan heads with beveled sides prevent removal with conventional tools. Install in a recess for utmost security.
- Can only be removed by tools exclusively manufactured in the USA by Ultra Fasteners – not available in hardware stores.
- Does not invite tampering as it appears to be an ornament rather than a fastener head.

Cosmetic

- Excellent end-product appearance.

Functional and Hygienic

- No flutes, recesses, holes or sharp edges.
- Ideal for medical and food-handling equipment – design prevents trapping of bacteria or food.
- Ideal for electronics – design prevents electron discharge.
- No sharp edges to snag clothing or cause injury.

Easy to Install

- Male-headed screws can be held in place by the screwdriver before entering the workpiece, simplifying their use even when access is limited.

Made in the USA



AVSAFE screwdriver




AVSAFE driver bit
(standard 1/4" hex)

TOOL SIZE	SCREWDRIVER PART NUMBER	DRIVER BIT PART NUMBER
4*	4AS.250SD	4AS.250B
6	6AS.250SD	6AS.250B
8	8AS.250SD	8AS.250B
10	10AS.250SD	10AS.250B

* Narrow barrel fits Med Gas

INCH & METRIC SIZES

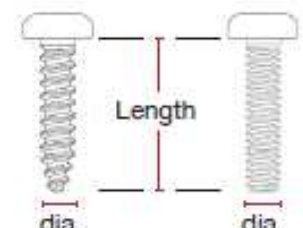

Tapping screw

Machine screw

10/2018

STOPPING THEFT EVERY DAY.™

Questions, quotes & solutions: toll-free 1.888.584.6283 or sales@LPfast.com | www.LPfast.com

SECURITY LAG BOLTS

One Way Construction Lag Screw

Self Tapping Tip - Pre-Drilling Not Required*

*A pre-drilled hole is still advisable to ease installation & reduce potential cracking of base material.

- Wide Sharp Threads for easier installation
- Steel, Black Oxide Coated For Enhanced Corrosion Protection
- Install With Regular Driver

Install/ Remove Tool # OWRB.18



5/16 x 1-1/2

Part # 516.15001WL

5/16 x 2

Part # 516.2001WL

5/16 x 3

Part # 516.3001WL

5/16 x 4

Part #516.4001WL


5/16 x 5

Part #516.5001WL

5/16 x 6

Part #516.6001WL

Minimum quantities may apply

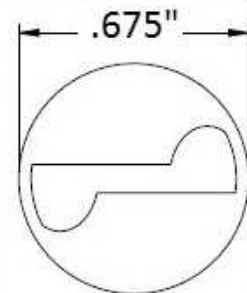

EASY installation or removal of ONE WAY Screws.
Unique Z fits tight, shroud prevents screw from slipping.



One Way Lag Screw



PART # OWRB.18

Desc: Adjustable Tool & L Key



LOSS PREVENTION

FASTENERS

div of Ultra Fasteners Inc

PH 888.584.6283

www.LPfast.com



PENTAGON HEAD Security Bolts




Stainless Steel Tough

Made in USA



Installation Socket

Standard Head Height .835"

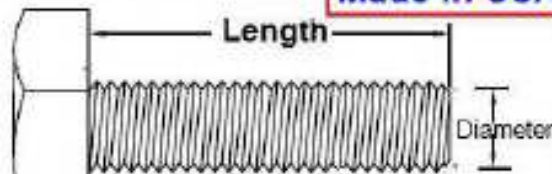

Standard Sizes

3/8-16 from 3/4" to 4"
1/2-13 from 3/4" to 4-1/2"

PART # 875.375S

Tools Not Available in Hardware Stores

Special Sizes & Materials Available by request
minimum quantities may apply



PENTAGON HEAD SECURITY LAG BOLTS

Stainless Steel Tough

Tools Not Sold In Hardware Stores



Made in USA



3/8" Lag Bolts 304 Stainless

PART # 375.2500PBSS	(3/8 x 2-1/2")
PART# 375.2750PBSS	(3/8 x 2-3/4")
PART# 375.300PBSS	(3/8 x 3")
PART# 375.3500PBSS	(3/8 x 3-1/2")
PART# 375.3750PBSS	(3/8 x 3-3/4")
PART# 375.4000PBSS	(3/8 x 4")
PART # 375.500PBSS	(3/8 x 5")
PART # 375.600PBSS	(3/8 x 6")
PART # 375.700PBSS	(3/8 x 7")

Minimum quantities may apply



Installation Socket
Tool # 875.375S

Tools Not Available in Hardware Stores

Made in USA

Special Sizes & Materials Available by request
minimum quantities may apply



LOSS PREVENTION

FASTENERS

div of Ultra Fasteners Inc

PH 888.584.6283

www.LPfast.com

THREAD-MAKING SCREWS

TYPE F & CUSTOM ORDERS



ULTRA 6 LOBE TYPE F POINT THREAD-CUTTING SCREW

CASE-HARDENED STEEL | STEEL | ZINC PLATED



PART NUMBER	SIZE TYPE F *	TOOL NUMBER
832.750TBZF 832.100TBZF	8-32 x 3/4" 8-32 x 1"	15T.250B
1024.375TBZF 1024.625TBZF 1024.100TBZF	10-24 x 3/8" 10-24 x 5/8" 10-24 x 1"	25T.250B
1032.500TBZF 1032.750TBZF	10-32 x 1/2" 10-32 x 3/4"	25T.250B
1420.750TBZF 1420.100TBZF 1420.1500TBZF	1/4"-20 x 3/4" 1/4"-20 x 1" 1/4"-20 x 1-1/2"	27T.250B


* Additional sizes available. Some items may require minimum quantities.

TYPE F POINT:


- A thread-cutting screw with a blunt tapered point
- Multiple cutting edges and chip cavities
- Use in heavy gauge sheet metal, aluminum, zinc and lead casting, cast iron, brass and plastic

THREAD-MAKING OPTIONS – MADE TO ORDER

INCH & METRIC SIZES | VARIOUS MATERIALS | MINIMUM QUANTITIES APPLY




TYPE B (Machine)



TYPE B (Tapping)



TYPE TT



TYPE 23



TYPE 1



TYPE 17

TYPE B POINT:

- A thread-cutting screw for use in metals .050 to .200 thick
- Used with drilled, punched or nested holes
- Larger root diameter with finer thread pitch for light and heavy sheet metal, non-ferrous castings, plastics and other materials

TRI-ROUND (TT):

- A thread-forming screw in mostly coarse machine screw threads
- Three vertexes perform a roll-forming process to form mating threads
- Much better thread-forming than Type C or CA, and drives with less torque

More security thread-making and thread-cutting screw options available – contact us!

10/2018

STOPPING THEFT EVERY DAY.™

Questions, quotes & solutions: toll-free 1.888.584.6283 or sales@LPfast.com | www.LPfast.com


SECURITY CONCRETE SCREWS ULTRA 6 LOBE MASONRY (1/4" dia.)



FAST & EASY TO INSTALL IN CONCRETE, BRICK, MASONRY AND HOLLOW BLOCK

- Security tamper-proof masonry screw
- Special high-low thread design cuts into masonry materials, providing a stable, fast and accurate installation.
- Climate-Coat® protection for corrosion resistance: Formulated for long life protection, providing optimal corrosion resistance properties (ASTM B117)
- Button head

Made in the USA

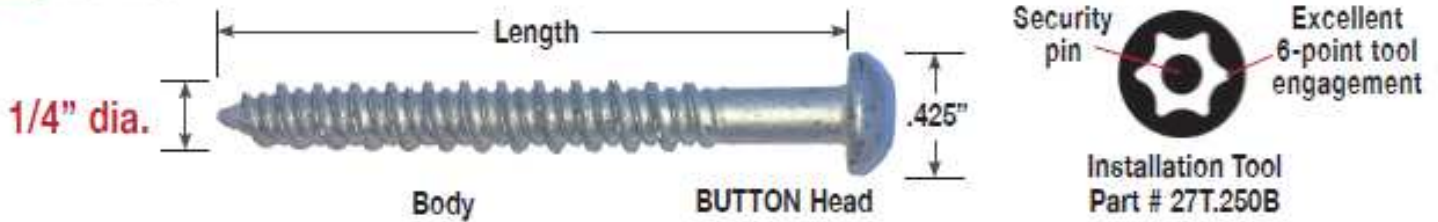

SIZE (DIA. x LENGTH) * inch	PART NUMBER Steel with Climate-Coat® protection	HOLE DIAMETER IN BASE MATERIAL
1/4 x 1-1/4	14.1250TBC	3/16"
1/4 x 1-3/4	14.1750TBC	3/16"
1/4 x 2-1/4	14.2250TBC	3/16"
1/4 x 2-3/4	14.2750TBC	3/16"


- * Additional sizes available. Minimum quantities may apply.
- * Screw lengths are measured from underneath the head.
- * To determine the minimum length of screw required, add the thickness of the material to be fastened to the minimum embedment for the diameter of screw being installed (see diagram and chart below).

Installation

1. Drill a 3/16" diameter hole into the base material at least 1/4" deeper than the screw length.
2. Blow the hole clean using compressed air. Alternatively, drill the hole deep enough to accommodate embedment length and drilling dust.
3. Install the screw through the fixture directly into the base material.
4. Tighten to required installation torque (see below).

IMPORTANT: Make sure the hole in the item being attached is slightly larger than the screw diameter.

Screw length:

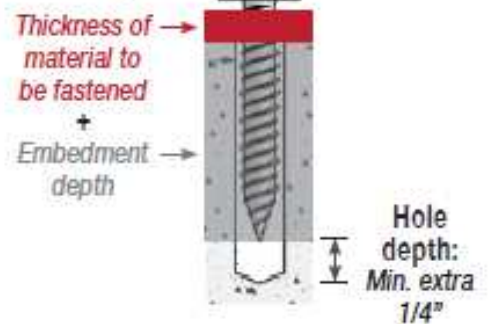

Ultimate Tension and Shear Loads in Concrete

SCREW DIA. inch	MIN. EMBED. DEPTH inch	f _c = 2,000 psi (13.8 mPa)		f _c = 3,000 psi (20.7 mPa)		f _c = 4,000 psi (27.6 mPa)		f _c = 5,000 psi (34.5 mPa)	
		TENSION lb.	SHEAR lb.	TENSION lb.	SHEAR lb.	TENSION lb.	SHEAR lb.	TENSION lb.	SHEAR lb.
1/4	1	750	900	775	900	800	1,380	950	1,440
	1-1/4	1,050	900	1,160	900	1,270	1,380	1,515	1,440
	1-1/2	1,380	1,200	1,600	1,200	1,820	1,380	2,170	1,670
	1-3/4	2,020	1,670	2,200	1,670	2,380	1,670	2,770	1,670

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.

10/2018

STOPPING THEFT EVERY DAY.™



Questions, quotes & solutions: toll-free 1.888.584.6283 or sales@LPfast.com | www.LPfast.com

SECURITY SELF-DRILL SCREWS

DRILL POINT TIP – FLAT HEAD



ULTRA 6 LOBE SECURITY | CASE-HARDENED STEEL OR 410 STAINLESS STEEL

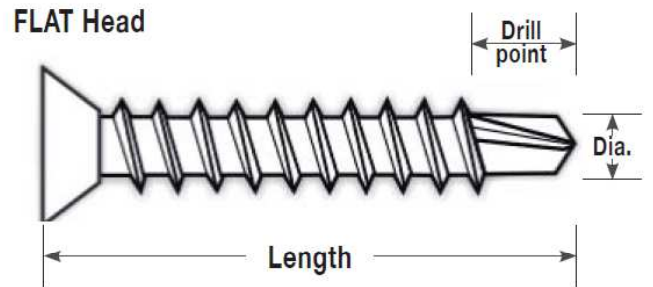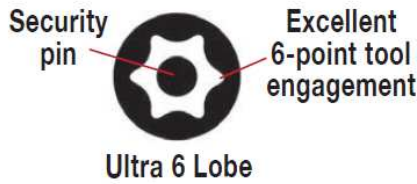

Flat head screw lengths are measured by overall length

FLAT HEAD TEK 410 STAINLESS STEEL		
SIZE (in.)	PART NUMBER	TOOL NUMBER
8 x 1/2	8.500TFTSS	15T.250B
8 x 3/4	8.750TFTSS	15T.250B
8 x 1	8.100TFTSS	15T.250B
8 x 1-1/4	8.12500TFTSS	15T.250B
8 x 1-1/2	8.1500TFTSS	15T.250B
8 x 2	8.200TFTSS *	15T.250B
10 x 1/2	10.500TFTSS	20T.250B
10 x 3/4	10.750TFTSS	20T.250B
10 x 1	10.12500TFTSS	20T.250B
10 x 1-1/2	10.1500TFTSS	20T.250B
10 x 2	10.200TFTSS	20T.250B
10 x 2-1/2	10.2500TFTSS *	20T.250B
10 x 3	10.300TFTSS *	20T.250B
12 x 3/4	12.750TFTSS	25T.250B
12 x 1	12.100TFTSS	25T.250B
12 x 1-1/4	12.1250TFTSS *	25T.250B
12 x 1-1/2	12.1500TFTSS	25T.250B
12 x 2	12.200TFTSS *	25T.250B
12 x 2-1/2	12.2500TFTSS *	25T.250B
12 x 3	12.300TFTSS *	25T.250B
14 x 1	14.100TFTSS	27T.250B
14 x 1-1/2	14.1500TFTSS	27T.250B
14 x 2	14.200TFTSS	27T.250B
14 x 2-1/2	14.2500TFTSS	27T.250B
14 x 3	14.300TFTSS	27T.250B

FLAT HEAD TEK CASE-HARDENED STEEL, ZINC PLATED		
SIZE (in.)	PART NUMBER	TOOL NUMBER
8 x 1/2	8.500TFT	15T.250B
8 x 3/4	8.750TFT	15T.250B
8 x 1	8.100TFT	15T.250B
8 x 1-1/4	8.12500TFT	15T.250B
8 x 1-1/2	8.1500TFT	15T.250B
10 x 1/2	10.500TFT	20T.250B
10 x 3/4	10.750TFT	20T.250B
10 x 1	10.100TFT	20T.250B
10 x 1-1/2	10.1500TFT	20T.250B
10 x 2	10.200TFT	20T.250B
14 x 1	14.100TFT	27T.250B
14 x 1-1/2	14.1500TFT	27T.250B
14 x 2	14.200TFT	27T.250B

Additional sizes available
Minimum quantities may apply

* Import

10/2018

STOPPING THEFT EVERY DAY.™



Questions, quotes & solutions: toll-free 1.888.584.6283 or sales@LPfast.com | www.LPfast.com

SECURITY SELF-DRILL SCREWS

DRILL POINT TIP – PAN HEAD



ULTRA 6 LOBE SECURITY | CASE-HARDENED STEEL OR 410 STAINLESS STEEL

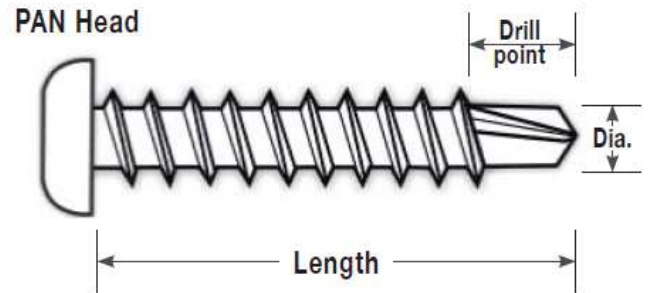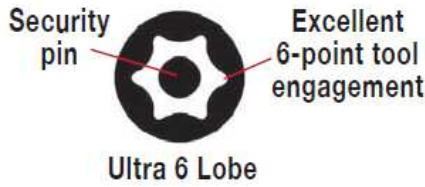

Pan head screw lengths are measured underneath the head

PAN HEAD TEK 410 STAINLESS STEEL

SIZE (in.)	PART NUMBER	TOOL NUMBER
6 x 3/8	6.375TPTSS *	15T.250B
6 x 1/2	6.500TPTSS *	15T.250B
8 x 1/2	8.500TPTSS	20T.250B
8 x 3/4	8.750TPTSS	20T.250B
8 x 1	8.100TPTSS	20T.250B
8 x 1-1/4	8.1250TPTSS	20T.250B
8 x 1-1/2	8.1500TPTSS	20T.250B
10 x 1/2	10.500TPTSS	25T.250B
10 x 3/4	10.750TPTSS	25T.250B
10 x 1	10.100TPTSS	25T.250B
10 x 1-1/4	10.1250TPTSS	25T.250B
10 x 1-1/2	10.1500TPTSS	25T.250B
10 x 2	10.200TPTSS	25T.250B
12 x 1	12.100TPTSS	27T.250B
12 x 1-1/4	12.1250TPTSS	27T.250B
12 x 1-1/2	12.1500TPTSS	27T.250B
12 x 2	12.200TPTSS	27T.250B
14 x 3/4	14.750TPTSS	30T.250B
14 x 1	14.100TPTSS	30T.250B
14 x 1-1/4	14.1250TPTSS *	30T.250B
14 x 1-1/2	14.1500TPTSS	30T.250B
14 x 2	14.200TPTSS	30T.250B

* Import


PAN HEAD TEK CASE-HARDENED STEEL, ZINC PLATED

SIZE (in.)	PART NUMBER	TOOL NUMBER
8 x 1/2	8.500TPT	15T.250B
8 x 3/4	8.750TPT	15T.250B
8 x 1	8.100TPT	15T.250B
8 x 1-1/2	8.1500TPT	15T.250B
10 x 1/2	10.500TPT	20T.250B
10 x 3/4	10.750TPT	20T.250B
10 x 1	10.100TPT	20T.250B
10 x 1-1/2	10.1500TPT	20T.250B
10 x 2	10.200TPT	20T.250B
14 x 3/4	14.750TPT	27T.250B
14 x 1	14.100TPT	27T.250B
14 x 1-1/2	14.1500TPT	27T.250B
14 x 2	14.200TPT	27T.250B
14-2/8 x 3/4	1428.750TPT	27T.250B
14-2/8 x 1	1428.100TPT	27T.250B

Additional sizes available
Minimum quantities may apply

CAPTIVE PANEL SCREW SECURITY

Inch & Metric Sizes
Various Materials

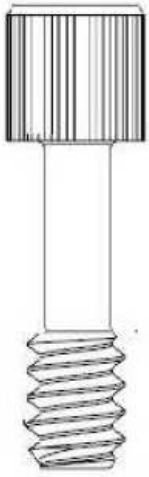

SHCS



BUTTON



FLAT

Minimum quantities may apply
Some sizes not available in all security styles



Spanner Security



Hex Pin Security




6 Lobe Pin Security




5 Lobe Pin Security

Hex Pin Security Shoulder Bolts

Inch & Metric Sizes
Various Materials

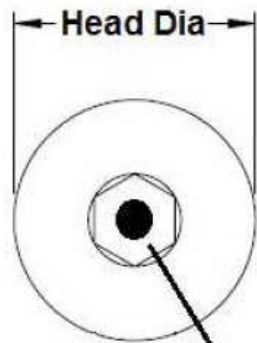

Security Pin

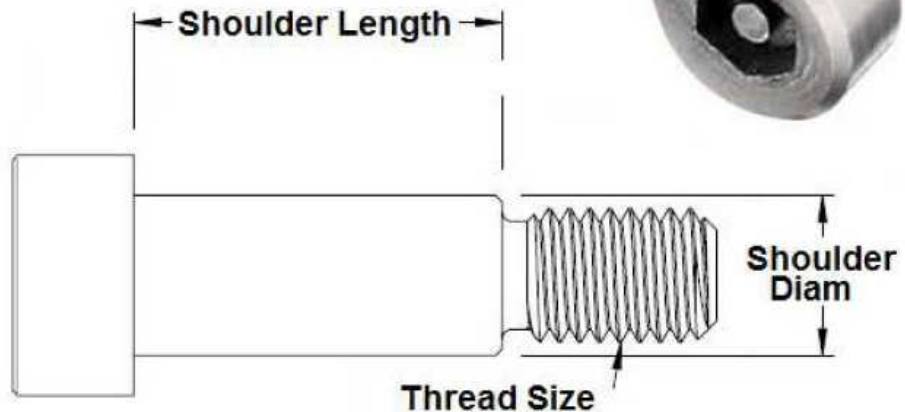

drawing not to scale



**LOSS PREVENTION
FASTENERS**

div of Ultra Fasteners Inc

PH 888.584.6283
www.LPfast.com

SECURITY SET SCREW Hex w/ Pin, Stainless



- Hex Pin Security
- Excellent Tool Engagement
- Stainless Steel Tough



Cup Point: Inch & Metric Sizes in Stock
* All Tip Styles Available Special Order


**SECURITY
TAMPER PROOF
SET SCREWS**

Call for a quote....

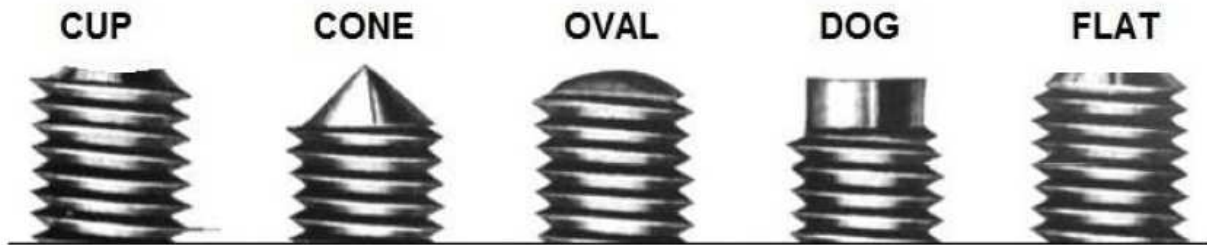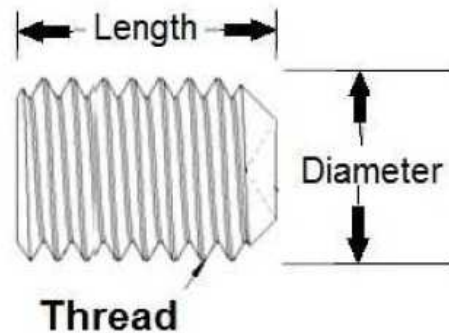

Socket Head Capscrews Hex Pin Security

**Inch & Metric Sizes
Various Materials**

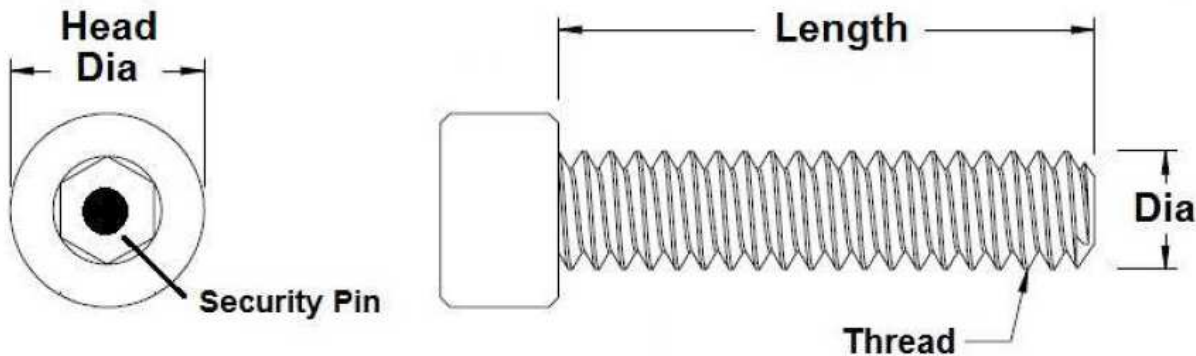

LOSS PREVENTION

FASTENERS

div of Ultra Fasteners Inc

PH 888.584.6283


www.LPfast.com

TORK-NUT

Break-Off Security Nuts

Inch & Metric Sizes

Made in USA

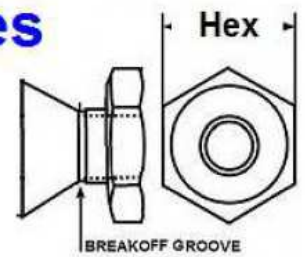

Install with Regular Tool
Permanent Security

not exactly as shown

Tork-Bolts™

Double Hex Head

Top Head Breaks Off at Your
Required Installation Torque

Ensure proper clamping force.

Ensure Proper Installation Torque
without the use of a torque wrench

Minimum quantities may apply

Inch & Metric Sizes
Various Materials



The top head breaks off
at your required torque

REMOVABLE AFTER INSTALLATION



**LOSS PREVENTION
FASTENERS**

Div of Ultra Fasteners Inc


PH 888.584.6283
www.LPfast.com

Tork-Bolts™

Break Off Bolts

M Series

- HIGH SECURITY, PERMANENT FASTENER
- NO SPECIAL TOOLS REQUIRED
- BUTTON OR COUNTERSUNK HEAD
- ALL MATERIALS AVAILABLE
- INCH, METRIC & CUSTOM SIZES

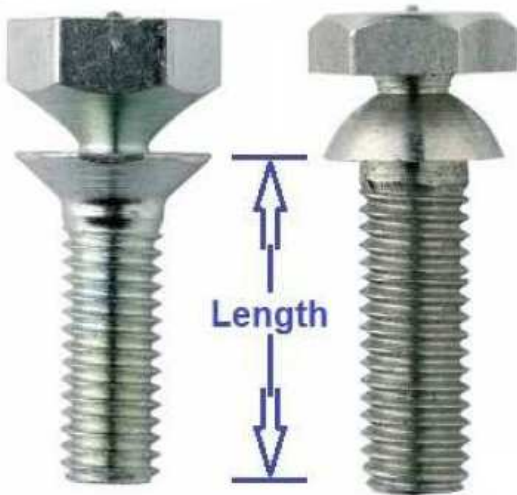

Flat head

Button Head

Minimum quantities may apply




Non Removable *after* Installation

TORK-NUT

Break-Off Security Nuts

**Inch & Metric Sizes
Various Materials**

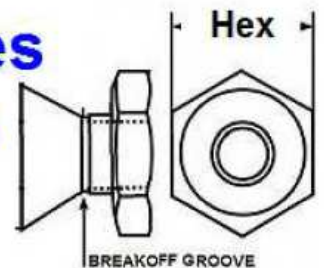

**Install with Regular Tool
Permanent Security**



**LOSS PREVENTION
FASTENERS**

DIV. OF ULTRA FASTENERS INC.

PH 888.584.6283

www.LPfast.com



**When the fastener needs to be
high security | tamper resistant | anti-theft**



**LOSS PREVENTION
FASTENERS** div of Ultra Fasteners Inc




**LICENCE
PLATE
Security
Screws**

INCH & METRIC

**5 LOBE WITH PIN
SECURITY SCREWS**

Tools **NOT** available in
hardware stores



Tapping screw



Machine screw

**LIGHT BAR
Security
Screws
& Nuts**



INCH & METRIC

T-GROOVE SECURITY NUTS

Tools **NOT** available in
hardware stores



**ROOF
RACK
Security**

SECURITY FASTENERS

Battery Bolts & Hold-downs

Wheel Covers

Electronic Items and Accessories

Catalytic Converters

And much more...

**Everything you need: Technical support,
custom solutions and timely delivery**



Made in the USA

COUNTERTOP MERCHANDISER HIGH SECURITY LICENCE PLATE SCREWS & TOOL



Trilingual package labels:
English, French and Spanish
Non-rusting stainless steel
Barcoded packages
Universal fit: import & domestic
Made in the

READY TO GO!
No assembly
required

EACH DISPLAY INCLUDES 50 PACKAGES WITH:

**4 HIGH SECURITY
SCREWS**



**1 INSTALL /
REMOVAL TOOL**



Fits most licence plates



Fits all screwdrivers
Tool NOT available in
hardware stores

Replace these




Regular tag screws

with this



Truss
head

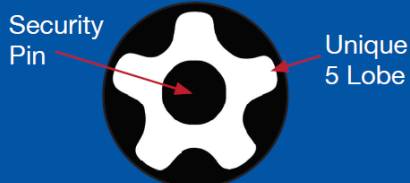

FEATURING
Ultra 5 Lobe Security

10/2018

STOPPING THEFT EVERY DAY.™

Questions, quotes & solutions: toll-free 1.888.584.6283 or sales@LPfast.com | www.LPfast.com



Toggle Security

Security options vary by size





Nom. Size	THREAD SIZE	Wing width	Folded Wing Length	required Hole Size
1/8"	6-32	1-1/2"	7/8"	3/8"
3/16"	10-24	2-1/8"	1-1/4"	1/2"
1/4"	1/4-20	2-1/8"	1-1/4"	5/8"
5/16"	5/16-18	2-5/8"	1-1/2"	7/8"
3/8"	3/8-16	3"	1-3/4"	7/8"
1/2"	1/2-13	4"-3/4"	2-3/4"	1-1/4"


Extra Long Lengths Available

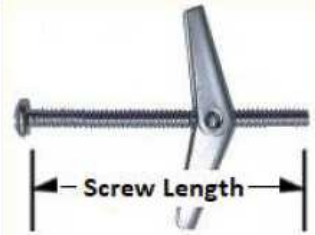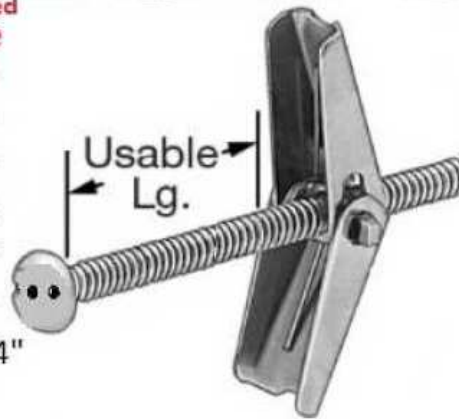

Thread Size

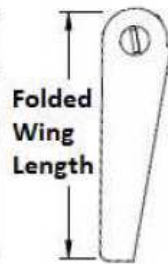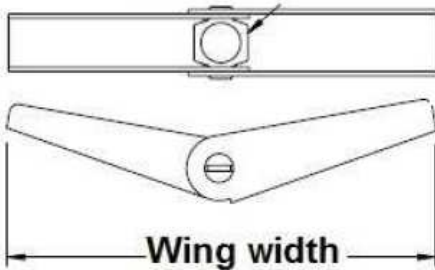

Determine screw length:
Material thickness + Wall Thickness + Folded Wing

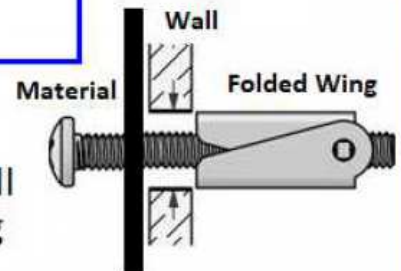

STOP WIRE THEFT

SOLVE COSTLY LIGHT POLE WIRE THEFT & INCREASE SAFETY

★ LABOR - MATERIAL - COMMUNITY FRUSTRATIONS ★
★ SAFETY ISSUES - BUDGETS ★

HHC INSPECTION COVERS

Single Hole Shown
Various Options Available



For Additional Security
install with ULTRA-LOK



LOSS PREVENTION FASTENERS

div of Ultra Fasteners Inc

PH 604.591.1100
www.LPfast.com


BARREL NUTS & SCREWS

ULTRA 6 LOBE SECURITY





18.8 STAINLESS OR STAINLESS | FEMALE BARREL NUT & MALE SCREW (AKA SEX BOLTS)

FEMALE SECURITY BARREL NUT (AKA Sex Nuts)

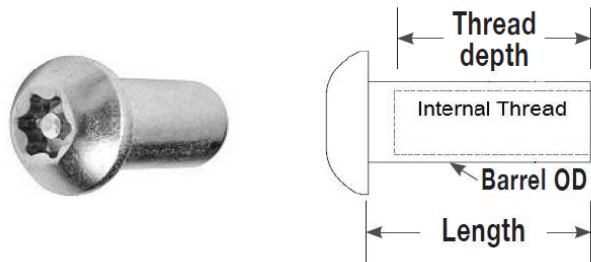


MALE SCREWS (sold separatley)

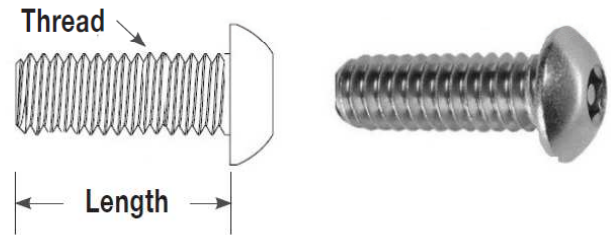

**BOTH FEATURING
TAMPER-RESISTANT
ULTRA 6 LOBE SECURITY**

Security
pin



Excellent
6-point tool
engagement

BARREL DIA. inch	BARREL LENGTH +/- inch	THREAD SIZE inch	THREAD DEPTH +/- inch	HEAD DIA. +/- inch	PART NUMBER	TOOL NUMBER
1/4	3/8	10-24	1/4	7/16	250.375.TBNSS	30T.250B
	1/2	10-24	1/4	7/16	250.500.TBNSS	30T.250B
	5/8	10-24	1/4	7/16	250.625.TBNSS	30T.250B
	3/4	10-24	3/8	7/16	250.750.TBNSS	30T.250B
	1	10-24	5/8	7/16	250.100.TBNSS	30T.250B
	1-1/4	10-24	7/8	7/16	250.1250.TBNSS	30T.250B
	1-1/2	10-25	1	7/16	250.1500.TBNSS	30T.250B
5/16	1/2	1/4-20	1/4	9/16	3125.500.TBNSS	30T.250B
	3/4	1/4-20	3/8	9/16	3125.750.TBNSS	30T.250B
	1	1/4-20	5/8	9/16	3125.100.TBNSS	30T.250B
	1-1/4	1/4-20	7/8	9/16	3125.1250.TBNSS	30T.250B
	1-1/2	1/4-20	1	9/16	3125.1500.TBNSS	30T.250B
3/8	3/4	5/16-18	1/2	.650	375.750.TBNSS	45T.250B
1/2	1-1/4	3/8-16	3/4	.865	500.1250.TBNSS	55T.250B
5/8	1-1/2	1/2-13	7/8	1.00	625.1500.TBNSS	55T.250B
3/4	1-1/2	5/8-11	7/8	1.125	750.1500.TBNSS	55T.250B

All sizes available | Minimum quantities may apply

10/2018

STOPPING THEFT EVERY DAY.™

Questions, quotes & solutions: toll-free 1.888.584.6283 or sales@LPfast.com | www.LPfast.com

TRI-SLOT

Security Screws - Tapping

- Tri-Wing[®] Tapping Screws Inch & Metric
- Ideal For Manufacturers & End Users
- Standard & Custom Sizes Available



Length



Pan Head



Flat Head



Length




TRI-SLOT

Security Screws - Machine

- Tri-Wing[®] Machine Screws Inch & Metric
- Ideal For Manufacturers & End Users
- Standard & Custom Sizes Available




Length




Pan Head



Flat Head



Length



**LOSS PREVENTION
FASTENERS**

div of Ultra Fasteners Inc

PH 888.584.6283
www.LPfast.com


Stopping theft every day.™

high security tamper resistant anti-theft

Security, Sealing

- Inch & Metric Sizes
- Various Security Options

Various Styles 6 Lobe Pin, 5 Lobe Pin, Hex Pin, T-Groove, Slot-lok etc
Button Head, Pan Head, Socket Head, T-Groove, Slot-Lok

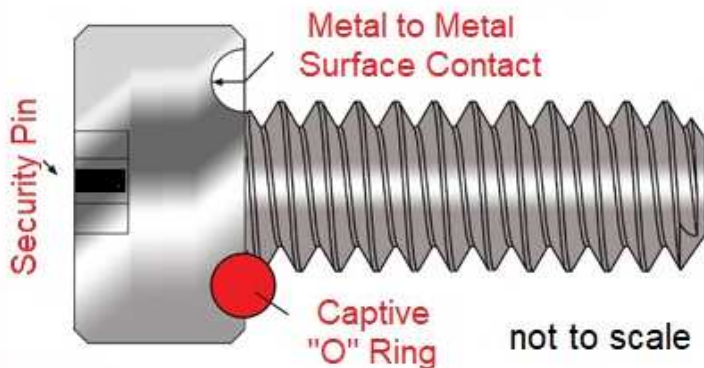

Minimum quantities may apply

not exactly as shown



Socket Head
Capscrew example

"O" ring provides 360 of protection
with Metal-to-metal contact

18.8 stainless steel

Made in USA



LOSS PREVENTION FASTENERS

div of Ultra Fasteners Inc

PH 888.584.6283
www.LPfast.com


SLOT-LOK BOLT

HIGH SECURITY FASTENER

- Inch & Metric Sizes
- Various Materials



- Tools sold to authorised personal only
- Bolt head design gives no sharp angles
- Drive doesn't fill & clog up with debris
- High Security

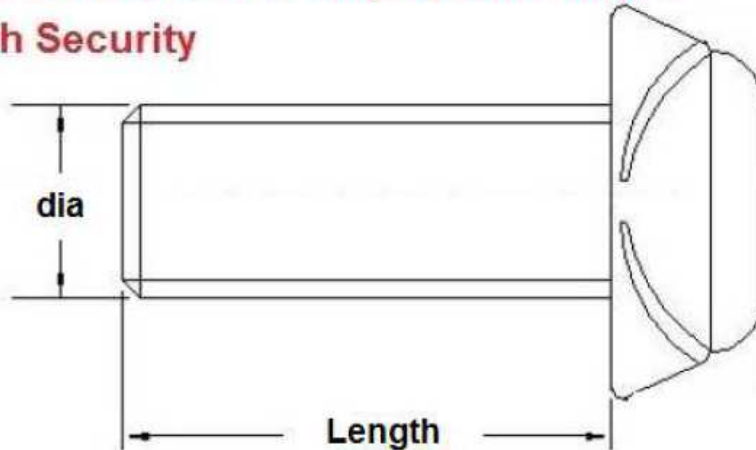

SLOT-LOK NUT

HIGH SECURITY FASTENER

- Inch & Metric Sizes
- Various Materials

- High Security removable nut
- Tools sold to authorised personal only
- Design provides no sharp angles for normal hand held gripping tools to be effective!



- Matching bolts available



**LOSS PREVENTION
FASTENERS**

div of Ultra Fasteners Inc

PH 888.584.6283
www.LPfast.com

ULTRA 6 LOBE

Stainless Steel Tough

Inch & Metric

upto 1/2-13 dia




Ultra 6 Lobe Security Pin



Flat head



Button Head



HEX-PIN

Security

Inch & Metric

Upto 3/4" diameter / Upto M20 diameter
minimum quantities may apply



Hex Pin Secure

Flat head



Length



Overall length



dia



dia

Button Head



Length



Under the head length

Various Materials



LOSS PREVENTION

FASTENERS

div of Ultra Fasteners Inc

PH 888.584.6283

www.LPfast.com

FIVE LOBE with PIN

Security Screws

Stainless Steel

Tools not available in hardware stores

· **BUTTON HEAD AND FLAT HEAD**
up to 3/8 & 10mm diameters

minimum quantities may apply


Made In USA



Flat head



Button Head

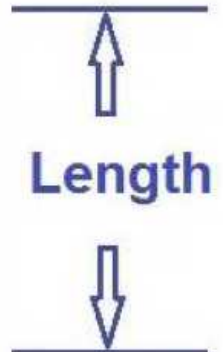

Inch & Metric Sizes

ULTRA 5 LOBE


Security with Pin Stainless Steel

Tools Not Available in Hardware Stores

· **BUTTON HEAD AND FLAT HEAD**

Up to 3" in length


Minimum quantities may apply

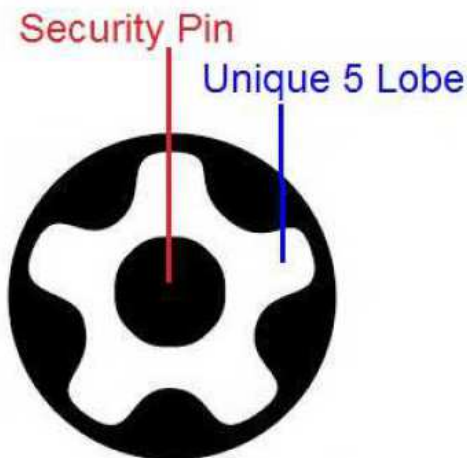

Flat head



Button Head

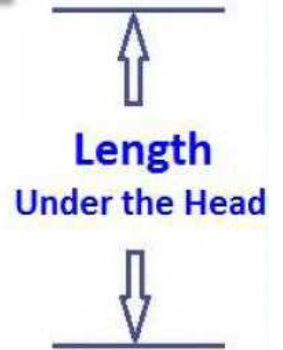

LOSS PREVENTION
FASTENERS

DIV. OF ULTRA FASTENERS INC.

PH 888.584.6283
www.LPfast.com


PHILL-PIN

- Versatile Security Fastener
- Pan Head & Flat Head
- Inch & Metric - Various Materials

Pan head is shown



Phillips-Pin Security Stainless Steel

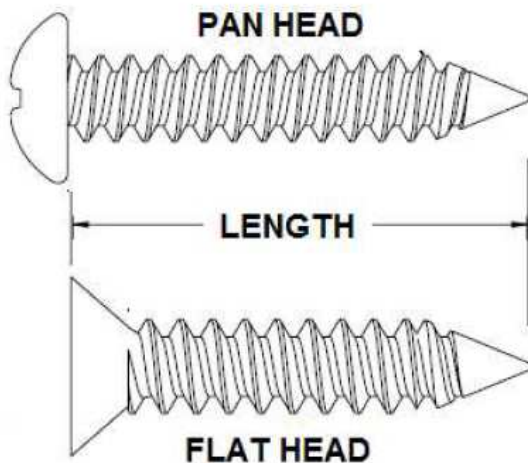

**LOSS PREVENTION
FASTENERS**

DIV. OF ULTRA FASTENERS INC.


PH 888.584.6283
www.LPfast.com

ULTRA 6 LOBE

Security Screws

Stainless Steel


- TAPPING SCREWS
- HIGHER TORQUE VALUES
- BUTTON HEAD AND FLAT HEAD
- EXCELLENT TOOL ENGAGEMENT

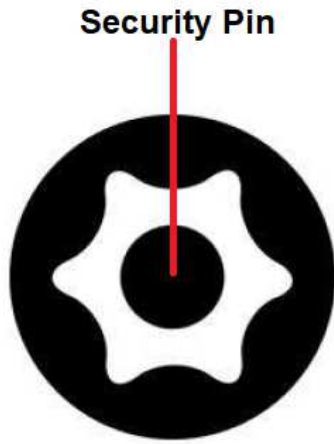

Flat head




Button Head

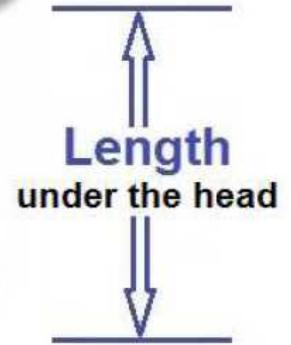

HEX-PIN

Security

- LARGE RANGE OF DIAMETERS & LENGTHS
- WIDE VARIETY OF MATERIALS
- BUTTON HEAD & FLAT HEAD

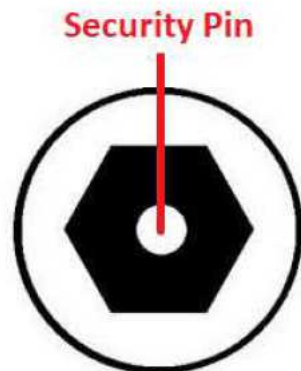

Flat head




Flat head

Button Head



Button Head

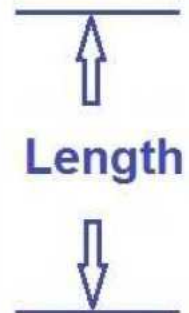

**LOSS PREVENTION
FASTENERS**

div of Ultra Fasteners Inc

PH 888.584.6283
www.LPfast.com

SECURITY PIN SHACKLE

PART # 3125.500DSSS
5/16" dia Stainless

PART # 3125.500DSG
5/16" dia Galvanized



Safety First. No More "S" Hooks





Stainless Steel

Galvanized Steel

5/16"
dia

5/16"
dia

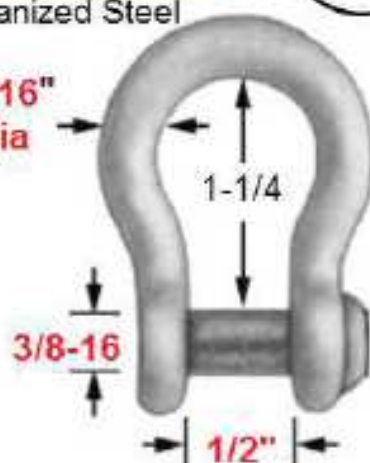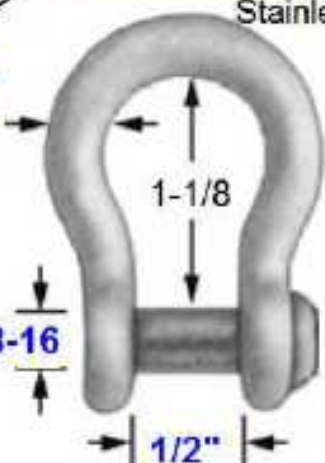

Hex-Pin

DOUBLE SHACKLE SECURITY PIN

Small & Large Opening - No More "S" Hooks - Re-Usable

PART #3816.DSCSS

Stainless Steel

PART #3816.DSCG

Galvanized Steel



HEX-PIN



**LOSS PREVENTION
FASTENERS**

div of Ultra Fasteners Inc

PH 888.584.6283
www.LPfast.com

T-Groove Security Stud System

Tools Not Available in Hardware Stores


Easy Installation:

Thread the first T-Groove Security Nut onto one end of the stud.

Pass The stud thru your project.

Thread the 2nd T-Groove Security Nut onto the stud.

Using the T-Groove Tool at each end tighten.

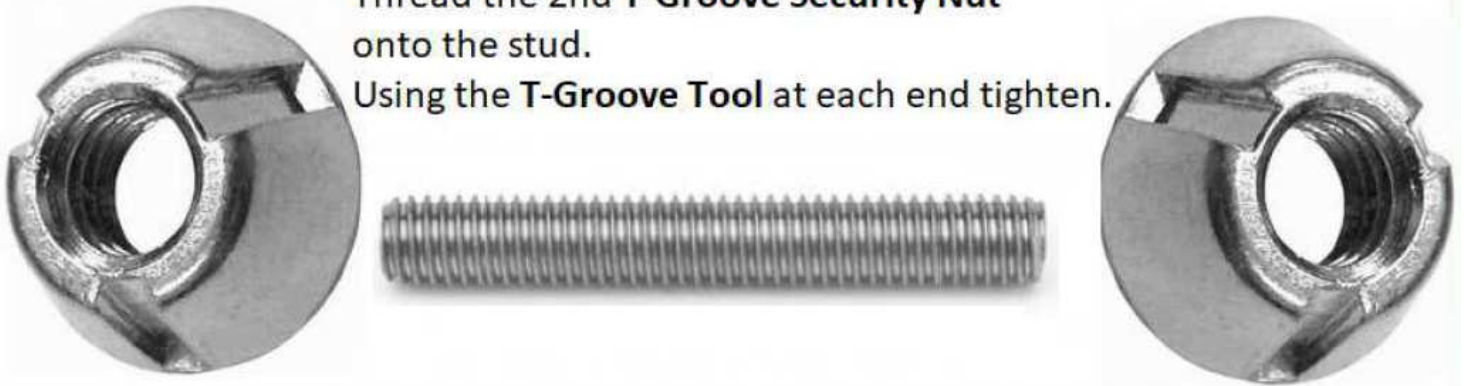

T-GROOVE
Security

Inch & Metric Sizes*
Unique Security

The T-Groove design prevents 'pooling of liquids'



ask about
T-Groove



Security Nuts



Tapping
Screws

Length



Machine
Screws

Holt Head Friendly



PART # TGBIT.AST (4 piece kit)
T-Groove Screw Driver Bits
Fits Screws (Not for use with nuts)
#4, #6, #8, #10, #14, 1/4, 5/16, 3/8

Made in USA

* minimum quantities may apply



LOSS PREVENTION

FASTENERS

div of Ultra Fasteners Inc

PH 888.584.6283

www.LPfast.com

Your trusted source for quality T-Groove™ products

SOCKETS

For use with
T-Groove™ nuts



4TG.250S



6TG.250S



10TG.250S



LPF420
LPF430
LPF440



LPF475
LPF100

SCREWS & NUTS

INCH & METRIC SIZES



Made in the USA

SCREWDRIVER BITS

FOUR-PIECE KIT: Part# TGBIT.AST

Fits all sizes of T-Groove™ screws: #4, #6, #8, #14,
1/4, 5/16, 3/8 (Not for use with T-Groove™ nuts)



Holt Head
Friendly



DEEP SOCKETS

For use with
T-Groove™ nuts



TIGHTEN WITH WRENCH | STUD COMES THROUGH TOP

WRENCH
SIZE

5/8"



LPF420W

13/16"



LPF430W

1"




LPF440W

1"



4TG.250S

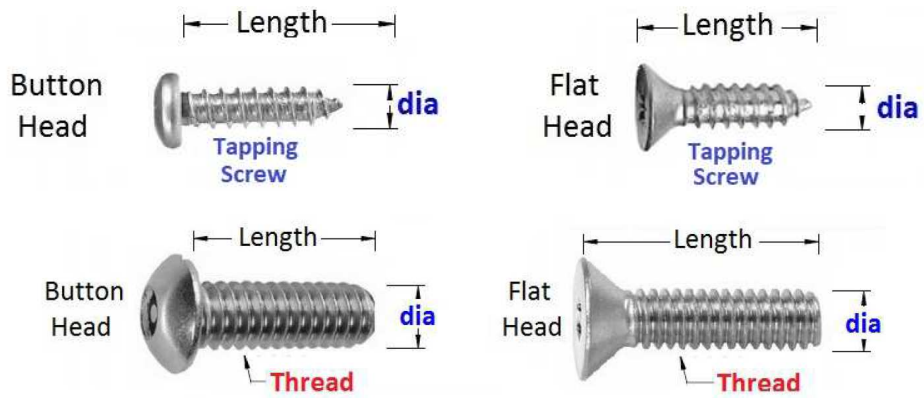

Tapping
Screw

INCH
Screw Size
Thread
Machine

← **Exact Decimal**
Diameter

This information also applies to nuts

FRACTION	DECIMAL	MM
1/64	.0156	0.396
1/32	.0312	0.793
3/64	.0468	1.190
1/16	.0625	1.587
5/64	.0781	1.984
3/32	.0937	2.381
7/64	.1093	2.778
1/8	.125	3.175
9/64	.1406	3.571
5/32	.1562	3.968
11/64	.1718	4.365
3/16	.1875	4.762
13/64	.2031	5.156
7/32	.2187	5.556
15/64	.2343	5.953
1/4	.250	6.350
17/64	.2656	6.746
9/32	.2812	7.143
19/64	.2968	7.540
5/16	.3125	7.937
21/64	.3281	8.334
11/32	.3437	8.731
23/64	.3593	9.128
3/8	.375	9.525
25/64	.3906	9.921
13/32	.4062	10.318
27/64	.4218	10.715
7/16	.4375	11.112
29/64	.4531	11.509
15/32	.4687	11.906
31/64	.4843	12.303
1/2	.500	12.700

METRIC
Exact Decimal
Diameter

#4 screw

#6 screw

#8 screw

#10 screw

#12 screw

#14 screw


1.4mm
1.6mm
2mm
2.5mm
3mm

4mm
5mm
6mm


8mm
10mm

12mm

STOPPING THEFT EVERY DAY.™



www.LPfast.com PH 888.584.6283




6 Lobe with Pin Drivers

SIZE	LENGTH 1"	LENGTH 2"	LENGTH 3"	LENGTH 3-1/2"	LENGTH 6"	LENGTH 12"	LENGTH 16"
1/4 Hex	1/4 Hex	1/4 Hex	1/4 Hex	1/4 Hex	1/4 Hex	1/4 Hex	1/4 Hex
T6	6T.250B	6T.250B2	X	6T.250B35	6T.250B6	X	X
T7	7T.250B	7T.250B2	7T.250B3	7T.250B35	7T.250B6	7T.250B12	X
T8	8T.250B	8T.250B2	8T.250B3	8T.250B35	8T.250B6	8T.250B12	X
T9	9T.250B	9T.250B2	9T.250B3	9T.250B35	9T.250B6	9T.250B12	X
T10	10T.250B	10T.250B2	10T.250B3	10T.250B35	10T.250B6	10T.250B12	X
T15	15T.250B	15T.250B2	15T.250B3	15T.250B35	15T.250B6	15T.250B12	15T.250B16
T20	20T.250B	20T.250B2	20T.250B3	20T.250B35	20T.250B6	20T.250B12	20T.250B16
T25	25T.250B	25T.250B2	25T.250B3	25T.250B35	25T.250B6	25T.250B12	X
T27	27T.250B	27T.250B2	27T.250B3	27T.250B35	27T.250B6	27T.250B12	X
T30	30T.250B	30T.250B2	30T.250B3	30T.250B35	30T.250B6	30T.250B12	X
T35	35T.250B	35T.250B2	35T.250B3	35T.250B35	35T.250B6	35T.250B12	X
T40	40T.250B	40T.250B2	40T.250B3	40T.250B35	40T.250B6	40T.250B12	X
T45	X	45T.250B2	X	X	45T.250B6	45T.250B12	X
T47	X	47T.250B2	X	X	47T.250B6	X	X
T50	X	50T.250B2	X	X	50T.250B6	X	X
T55	55T.250B	X	X	X	X	X	X

LPfast.com products may require minimum package

HEX-PIN SECURITY




INCH

Hex Pin Driver Bit



Hex Pin L-Key

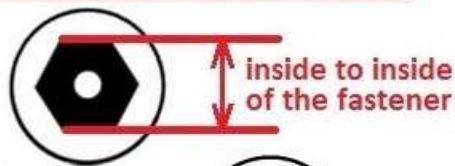

inside to inside of the fastener



Stud O.D.



Size:	PART NUMBER
1/16"	1/16.250B
5/64"	5/64.250B
3/32"	3/32.250B
7/64"	7/64.250B
1/8"	1/8.250B
9/64"	9/64.250B
5/32"	5/32.250B
3/16"	3/16.250B
7/32"	7/32.250B
1/4"	1/4.250B
5/16"	5/16.250B
3/8"	3/8.250B
7/16"	7/16.25LK
1/2"	1/2.250LK
9/16"	9/16.250LK
5/8"	5/8.250LK
3/4"	3/4.250LK

Custom sizes available by request



LOSS PREVENTION

FASTENERS

div of Ultra Fasteners Inc

PH 888.584.6283


www.LPfast.com

Extension / Long Reach Tool Bit Holders

BONUS: its flexible for the hard to reach

Length	Part Number
7-1/2"	250.7500FBIT*
11"	250.1100FBIT**
18"	250.1800FBIT**
24"	250.2400FBIT**
36"	250.3600FBIT**
48"	250.4800FBIT**

Rated foot pound 13**
3.5*

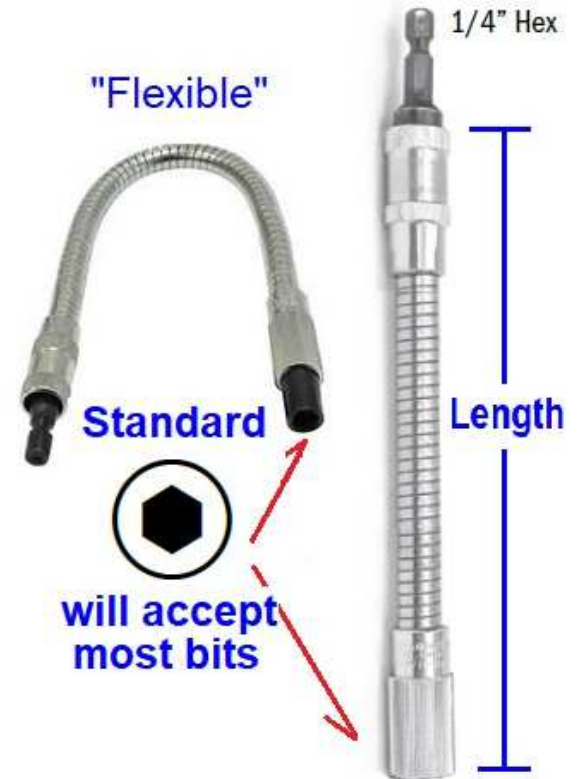

SNAKE EYES Security



1/4 Hex Bits
Part #

Screw Size

Centre to Centre (A)

Screw Head Diameter

4S.250B

4

0.094"

0.183" - 0.235"

6S.250B

6

0.125"

0.226" - 0.290"

8S.250B

8

0.156"

0.270" - 0.344"

10S.250B

10

0.187"

0.313" - 0.399"

12S.250B

12

0.218"

0.357" - 0.454"

14S.250B

14, 5/16

0.250"

0.414" 0.525"

16S.250B

0.340"

18S.250B

0.430"

20S.250B

0.475"

1SN.250B

SPANNER NUT

0.500"

SPANNER NUT



To order a screwdriver change to "B" to "SD"



LOSS PREVENTION

FASTENERS

div of Ultra Fasteners Inc

PH 888.584.6283


www.LPfast.com

ONE WAY SCREW INSTALL / REMOVE TOOL

EASY installation or removal of ONE WAY Screws. Unique Z fits tight, shroud prevents screw from slipping.

Directions For Use:

- Use enclosed Hex Key and loosen the Set Screw on the collar. (Fig. 1)
- Pull the tip back & make sure you have selected the right size One Way Screw Remover. (Fig. 2)
- The collar should fit tightly around the One Way Screw Head! If you have selected the right size

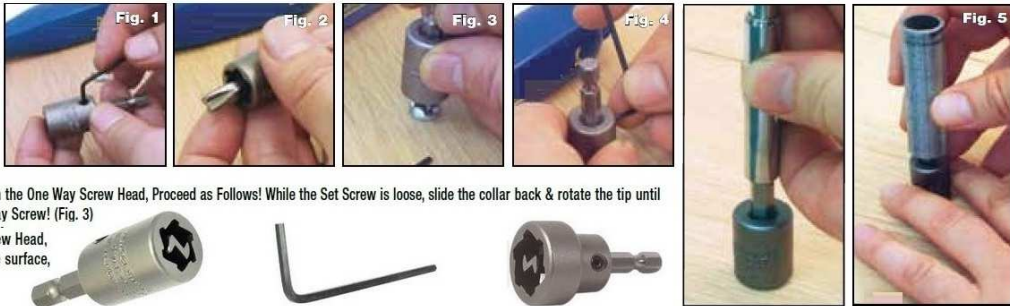

Remover and the collar is tightly on the One Way Screw Head, Proceed as Follows! While the Set Screw is loose, slide the collar back & rotate the tip until it seats into the head of the One Way Screw! (Fig. 3)


- Once the tip is seated into the Screw Head, Slide the collar down flush with the surface, then tighten the screw. (Fig. 4)

- If the screw head is slightly larger than the inside of the collar and the collar will not go flush to the surface, slide a piece of pipe while the set screw is loose over the tip and rest it on the collar (The pipe is used to protect the shaft of the Screw Remover from the Tapping of Hammer). Gently tap on the end of the pipe and the outer ring of the collar until the collar is flush with the surface. (Fig. 5)

- When collar is flush to the surface, tighten the set screw and press on the One Way Remover while rotating counter clockwise to remove the screw. (Fig. 6 For use

SCREW DIA	Fits Head Dia	2.5" Tool Part #	9" LONG Tool Part #
#6	.224"	OWRB.6	OWRB.6.L
#8	.260"	OWRB.8	OWRB.8.L
#10	.339"	OWRB.10	OWRB.10.L
#12	.392"	OWRB.12	OWRB.12.L
#14	.443"	OWRB.14	OWRB.14.L
#15	.570"	OWRB.15	OWRB.15.L
#16	.665"	OWRB.16	OWRB.16.L
#18-20	.684"	OWRB.18	OWRB.18.L

COMPLETE KIT: (1 tool each size) Part # OWBIT.AST

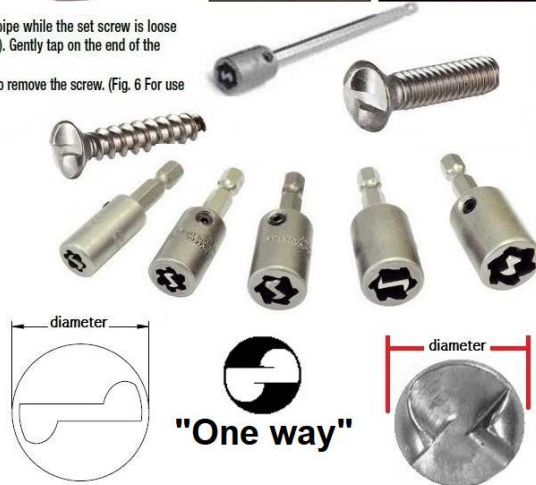

PENTAGON HEAD Tools & Bolts

Tools Not Sold In Hardware Stores

Installation Socket

all sockets 1/2" drive


Tools Not Available in Hardware Stores



Often referred to as:

<p>9/16 head</p>	<p>most common 7/8 head</p>	<p>Large 7/8 head</p>	<p>1 inch head</p>
<p>PART # 562.375S</p>	<p>PART # 875PB.375S</p>	<p>PART # 875PBL.500S</p>	<p>PART # 100PB.500S</p>

We Stock:
Penta Head Machine Bolts
Penta Head Lag Bolts



ask about custom sizes



LOSS PREVENTION

FASTENERS

div of Ultra Fasteners Inc

PH 888.584.6283

www.LPfast.com

Stopping theft every day.™



**high security
tamper resistant
anti-theft**



**LOSS PREVENTION
FASTENERS®** div of Ultra Fasteners Inc

RFQ's, drawings, or questions to Email: sales@LPfast.com

Ready to order?



NOTE: Size and quantity may limit the security options. Not all items shown – if you don't see what you need, ask!

PLEASE CALL WITH THE FOLLOWING INFO:

- 1. Fastener type:** Anchor | Nut | Machine Screw | Tapping Screw | Drill Point | Concrete | Other
- 2. Size:** Diameter | Thread | Length (*inch or metric available*)
- 3. Screw/anchor head options:** Button (pan, round, truss) | Flat (countersunk)
- 4. Security type/option:** We do our best to provide your exact request. If that security drive is not available, we will offer a suitable alternative.
- 5. Quantity:** Typical quantity is 100 pieces. Ask about project quantity, bulk and mini bulk.

CALL US TODAY: 1.888.584.6283 ext 500 – ask for Distributor Sales

Non-standard/custom products: 1.888.584.6283 ext 105 – ask for Special Projects

LPfast.com

Stopping Theft Every Day™