

Loss Prevention Fasteners

Security Toggles

Piece of mind -tamper resistant

LONG REACH, LONG GRIP TOGGLES

Applications: Drywall/wallboard
Steel plate • Wood • All hollow materials
Hollow masonry/CMU

made in USA



Steel Channel	Steel	Security Screw	Hole Size	Grip Range
PART #				
250.625FLTGL	comes with	2 inch Flat	1/2"	3/8" to 3-5/8"
250.625BLTGL		2-1/2" BTN	1/2"	3/8" to 3-5/8"



Button Head Flat Head

Steel Channel	Stainless	Security Screw	Hole Size	Grip Range
PART #				
250.625FLTGLSS	comes with	2-1/2 FLT	1/2"	3/8" to 3-5/8"
250.625BLTGLSS		2-1/2 BTN	1/2"	3/8" to 3-5/8"


Pre-installs without the bolt to make handling of fixture easier

Reusable in the same hole – remove the bolt without losing the anchor

New **ergonomic design** – fingers grip straps naturally and more easily with no slipping

Use a screw gun - anchor does not spin


US Federal Specifications: FF-B-588D, Type V

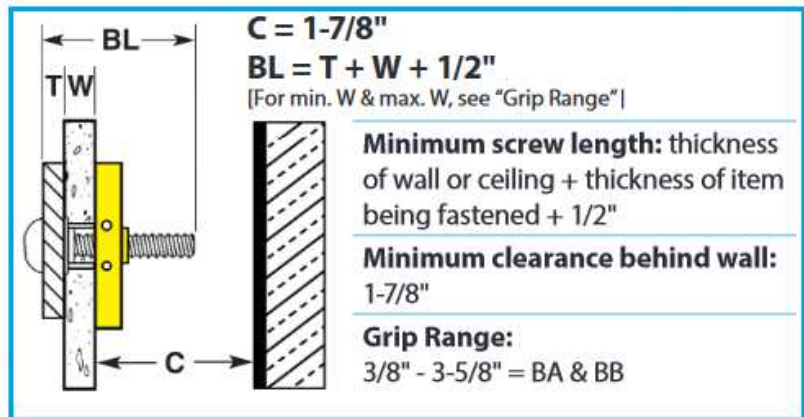

- Provides high holding values up to twice the load of standard wing toggles – Resists vibration and shock
- Requires 50% smaller hole size than standard wing toggles – Maintains integrity of wall, ceiling, or floor
- Solid metal channel secures the bolt • Strong, ergonomic strap design – Finger grips provide handling without slipping

Installation • Channel: Yellow zinc-plated cold rolled steel or 304 stainless steel • Straps and handle: High-impact polystyrene

1. Slide metal channel into the pre-drilled hole	2. Hold ends of straps and pull toward you until channel rests flush behind wall or ceiling	3. Pull back on straps and slide plastic cap along straps until flange of cap is flush with wall or ceiling	4. Push straps side to side, snapping off straps level with wall, then discard straps	5. Place item over flange. Insert bolt through item and tighten until flush against item, then stop



LOSS PREVENTION
FASTENERS
div of Ultra Fasteners Inc

PH 888.584.6283
www.LPfast.com